

3-WAY BOTTOM ENTRY™

JUNCTION BOX - Ex eb I, Ex eb IIC, Ex ec IIC, Ex tb IIC

for Hazardous Area Installations

Features and Benefits

- 3-Way Bottom Entry™ Box for hazardous area lighting installations.
- For use in Group I mining (low impact areas), Group II and Group III applications.
- Screw-on lid provides ease of installation. Lid locking with a special key prevents unauthorized tampering.
- Supplied complete with safety securing lid lanyard.
- Only approved CCG cable glands and terminals must be used. No exposed metal parts.
- Dust and waterproof to IP66/68, when used with CCG sealed cable glands.
- No drilling or tapping of cable entries required. Mounting studs provided for DIN rail if using terminal blocks.
- Internal earthing to all entries and rail provided.

Technical Data

| | |
|-----------------------|---|
| Type: | 3-Way Bottom Entry™ Box |
| Box Material: | Impact corrosion and UV resistant glass reinforced polyester compound Polycarbonate (see-through adapt-a-lids) O ring seals: Silicone or Sarlink seals. Terminals: Wellamid or Wemidd Brass internal earthing and rail mountings |
| Inserts: | Certified Terminals, (see conditions on safe use-x) Blanking Plugs and Box Spanner (Lid Locking Key) |
| Optional Accessories: | |
| Note: | The installer should check that the materials are suitable for the installation environment. |

Standards and Certifications

Equipment Protection Levels: SANS: (Finished) Ex e IIC T6 Gb / Ex nA IIC T6 Gc / Ex tb IIC T70°C Db
SANS: (Unfinished) Ex e IIC Gb / Ex nA IIC Gc / Ex tb IIC Db
IECEX/INMETRO: (Finished) Ex eb I Mb / Ex eb IIC T6 Gb / Ex ec IIC T6 Gc / Ex tb IIC T70°C Db / Ex tc IIC T70°C Dc
IECEX/INMETRO: (Unfinished) Ex eb I Mb / Ex eb IIC Gb / Ex ec IIC Gc / Ex tb IIC Db / Ex tc IIC Dc
ATEX/UKEX: (Finished) I M2, II 2GD / 3G Ex eb I Mb / Ex eb IIC T6 Gb / Ex ec IIC T6 Gc / Ex tb IIC T70°C Db / Ex tc IIC T70°C Dc
ATEX/UKEX: (Unfinished) I M2, II 2GD / 3G Ex eb I Mb / Ex eb IIC Gb / Ex ec IIC Gc / Ex tb IIC Db / Ex tc IIC Dc
CCC: (Finished) Ex eb IIC T6 Gb, Ex tb IIC T70°C Db, Ex tc IIC T70°C Dc
CCC: (Unfinished) Ex eb IIC Gb, Ex tb IIC Db, Ex tc IIC Dc

Ambient Temperature:

Service Temperature:




Conformance:

| | | | |
|-----------------------------|---|------------------------------|-----------------------|
| IECEX | Standard: | Certificate: | |
| | IEC 60079 Part 0, 7, 31, IEC 60529 | IECEX CML 15.0072X | (Finished) |
| | IEC 60079 Part 0, 7, 31, IEC 60529 | IECEX CML 15.0071U | (Unfinished) |
| | IEC 60079 Part 0, 7, 31, IEC 60529 | IECEX TSA 25.0012X | (Finished) |
| | IEC 60079 Part 0, 7, 31, IEC 60529 | IECEX TSA 25.0011U | (Unfinished) |
| ATEX | EN 60079 Part 0, 7, 31 | CML 14ATEX3036X | (Finished) |
| | EN 60079 Part 0, 7, 31 | CML 14ATEX4038X | (Finished) |
| | EN 60079 Part 0, 7, 31 | CML 14ATEX3037U | (Unfinished) |
| | EN 60079 Part 0, 7, 31 | CML 14ATEX4039U | (Unfinished) |
| UKEX | EN/BS 60079 Part 0, 7, 31 | CML 21UKEX3008X | (Finished) |
| | EN/BS 60079 Part 0, 7, 31 | CML 21UKEX4010X | (Finished) |
| | EN/BS 60079 Part 0, 7, 31 | CML 21UKEX3007U | (Unfinished) |
| | EN/BS 60079 Part 0, 7, 31 | CML 21UKEX4009U | (Unfinished) |
| INMETRO (Brazil) | ABNT NBR IEC 60079 Part 0, 7, 31, IEC 60529 | TÜV 15.0481X | (Finished) |
| | ABNT NBR IEC 60079 Part 0, 7, 31, IEC 60529 | TÜV 15.0482U | (Unfinished) |
| TR CU (Russia) | ГОСТ 31610-0, 15, ГОСТ Р МЭК 60079-7, 31 | EA9C RU C-ZA.HA91.B.00243/21 | (Finished/Unfinished) |
| CCC/CNEX (Chinese) | GB/T3836.1, 3, 31-2021 | CNEX 21.3507X | (Finished) |
| | GB/T3836.1, 3, 31-2021 | CCC 2021312303000506 | (Finished) |
| | GB/T3836.1, 3, 31-2021 | CNEX 21.3390X | (Unfinished) |
| | GB/T3836.1, 3, 31-2021 | CCC 2021312313000393 | (Unfinished) |
| SANS | SANS/IEC 60079 Part 0, 7, 31 | MASC S/21-9001X | (Finished) |
| | SANS/IEC 60529 | MASC S/21-9002U | (Unfinished) |
| IP66/68 2m Protection | IEC 60529 | IECEX CML 15.0071U | |
| Marine ABS | IEC 60529 | 25-0167226-PDA | |
| DNV | IEC 60529 | TAE0000011 | |
| ClassNK | IEC 60079 Part 0, 7, 31 | TA25240M | |
| Deluge Protection | DTS-01 | CML 14CA370-1 | |
| Short Circuit/ Cont.Current | IEC 60947-7-2, IEC 62444 | CATAPULT OR/15/11677_2 | |



Conditions for Safe Use - X

- In Group I applications, the junction box must only be used in low impact areas and where it is not exposed to oils or greases.
- Only the CCG tool supplied shall be used for opening / closing the enclosure.
- Suitably certified cable glands and/or plugs shall be used in the enclosure threaded entries
- Terminal blocks shall only be used on the applicable rail and shall allow sufficient space to make connections and to close the cover / lid. Only the Weidmuller terminals shown in Table 2 may be used.
- The creepage and clearance between terminal blocks and from the terminal block to any earthed / bonded metallic part shall comply with the EN60079-7 requirements for the acceptable voltage of the terminal blocks.



PATENTED

| Product Code | Box Size Reference | Entry Thread 'A' | Inside Dimension 'B' | Internal Diameter 'C' | Mounting Centres 'D' | Rail Mounting Centres 'E' | Outer Height 'F' | Dim. 'I' |
|--------------|--------------------|------------------|----------------------|-----------------------|----------------------|---------------------------|------------------|----------|
| 100201-B | 1 | M20 x 1.5 | 68.0 | 101.0 | 132.0 | 80.0 | 124.0 | - |
| 100202-B | 2 | M25 x 1.5 | 100.0 | 123.0 | 162.0 | 92.0 | 160.0 | 81.0 |

All dimensions are in mm.

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance.

3WAYBEEEX-HB140625

3-WAY BOTTOM ENTRY™ JUNCTION BOX

Conditions for Safe Use - X

- The current in the junction box is limited by the size of the conductor and shall not exceed as per the table below.
- Only the terminals listed below may be used, following the specific installation conditions set down by the terminal manufacturer/terminal certification.

| Manufacturer | Certificate No. | Ex Coding | Type | Conductor / Terminal Block Size | Maximum Current | |
|--------------|---|-----------|--|---------------------------------|-----------------|----------------|
| | | | | | ≤ 55°C Ambient | ≤ 40°C Ambient |
| Weidmuller | IEC Ex ULD14.0005U Demko 14ATEX1338U CCC 2020322313001819 | Ex eb IIC | WDU 2.5, 4, 6, 10, 16, 35 and 70N WPE 2.5, 4, 6, 10, 16, 35 and 70N | 2,5 mm ² | 8,34 A | 11,90 A |
| | | | | 4 mm ² | 11,12 A | 15,86 A |
| | | | | 6 mm ² | 14,25 A | 20,33 A |
| | | | | 10 mm ² | 19,81 A | 28,26 A |
| | | | | 16 mm ² | 26,42 A | 37,68 A |
| Weidmuller | IECEx TUR18.0024U TÜV 18 ATEX 8221U CCC 2020322313002230 | Ex eb IIC | AKZ4 and AKE4 | 4mm ² | 11,12 A | 15,86 A |

Wiring and Installation instructions for 3-Way Bottom Entry™ Box without components


- Installation must be carried out by a competent person.
- The box must not be modified in any way, as this will invalidate the certification.
- Where cables enter the box they must be secured by CCG Cable Glands appropriate to the make up of the cable.
- Unused entry apertures must be blanked with certified CCG Blanking Plugs.
- To maintain IP 66/68 a thread seal gasket between the box and cable gland must be installed.
- Before replacing the lid, ensure the lid gasket is in place.
- The use of a CCG Box Spanner (Lid Locking Key) is required to maintain the tamper proof integrity of the box, refer Figure 1.

Wiring and Installation instructions for 3-Way Bottom Entry™ Box with components

- Installation must be carried out by a competent person.
- Do not install under live current conditions.
- The box must not be modified in any way, as this will invalidate the certification.
- All wiring must be carried out in accordance with the relevant Codes of Practice.
- The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown in Figure 2.
- The voltage and current value of the box must not be exceeded.
- See relevant certificate for current limitations for conditions of use / schedule of limitations.
- Only those terminals shown in the terminal schedule may be incorporated in the box, refer Table 1.
- Inner cable bedding must protrude into the box by a minimum of 20mm past the cable entry point.
- Not more than one single or multiple strand lead shall be connected into either side of the terminals.
- Only earth conductors of equal size shall be connected with rail mounted terminals.
- All terminal screws used and unused shall be tightened.
- A parallel shaft screw driver of the correct size should be used for rail mounted terminals screws.
- Where cables enter the box they must be secured by CCG Cable Glands appropriate to the make up of the cable.
- Unused entry apertures must be blanked with certified CCG Blanking Plugs.
- To maintain IP66/68 a thread seal gasket between the box and cable gland must be installed.
- Before replacing the lid, ensure the lid gasket is in place.
- The use of a CCG Box Spanner (Lid Locking Key) is required to maintain the tamper proof integrity of the box, refer Figure 1.

FIGURE 1

To ensure the box apparatus is tamper proof. Screw on, tighten and lock lid in place by means of a CCG Box Spanner (Lid Locking Key).

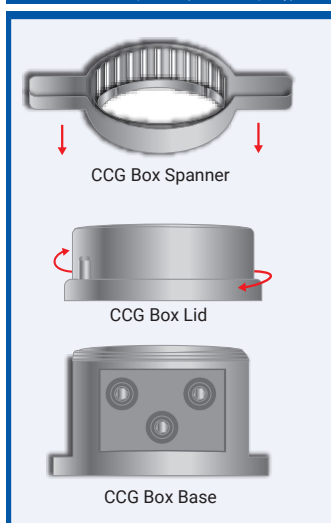

CCG Box Spanner


| Product Code | Box Size |
|--------------|----------|
| 401201 | 1 |
| 401202 | 2 |

TABLE 1


| Box Type | Box Size Ref | Terminal Type and Size | Max Quantity | Rail Size |
|--------------|--------------|--------------------------------|--------------|-----------|
| 3-Way BE Box | 1 | 4mm ² mini terminal | 8 | 15 |
| 3-Way BE Box | 2 | 2.5mm ² | 12 | 35 |
| 3-Way BE Box | 2 | 4mm ² | 12 | 35 |
| 3-Way BE Box | 2 | 4mm ² mini terminal | 12 | 15 |
| 3-Way BE Box | 2 | 6mm ² | 8 | 35 |
| 3-Way BE Box | 2 | 10mm ² | 7 | 35 |

TABLE 2

| VOLTAGE PER TERMINAL CONFIGURATION | | |
|------------------------------------|------|-----------------|
| Terminals | Volt | Earth Terminals |
| AKZ 4 | 275V | AKE 4 |
| WDU 2.5 | 550V | WPE 2.5 |
| WDU 4 | 550V | WPE 4 |
| WDU 6 | 550V | WPE 6 |
| WDU 10 | 550V | WPE 10 |
| WDU 16 | 550V | WPE 16 |

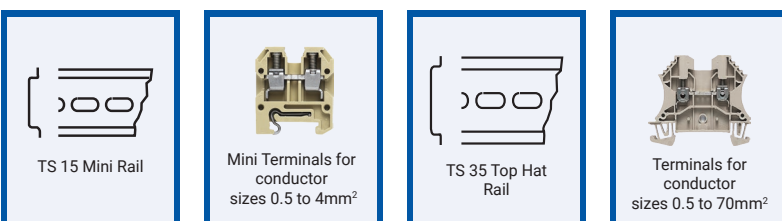

Non Metallic Plugs IP66/68 complete with washer



| Product Code | Box Size Ref. | Metric Dia 'A' | Dia Max 'B' | Dia Max 'C' | Dia Min 'D' | Hex Size Max A/F | Torque Value Nm |
|--------------|---------------|----------------|-------------|-------------|-------------|------------------|-----------------|
| 352720 | 1 | M20x1.5 | 7.0 | 28.0 | 12.0 | 10.0 | 7.0 |
| 352725 | 2 | M25x1.5 | 7.0 | 33.0 | 15.0 | 10.0 | 9.0 |

FIGURE 2

The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown below.

