

E1W LSOH

CAPTIVE COMPONENT GLAND®

for SWA and Aluminium Armoured Fire Rated Cable



Features and Benefits

- For indoor and outdoor use. Two piece handling, no loose parts.
- Freely rotating captive cone and inspectible cone ring, providing an armour clamp and earth bond without twisting the armouring.
- Patented disconnect armoured clamp system for ease of inspection.
- Provides a seal on the inner and outer sheath of the cable sealing to IP65/66/68.
- Precision manufactured from high-quality brass (nickel plated) available in aluminium or stainless steel 316/316L on request.
- Complete with heavy duty locknut.
- Silicon seals are fire retardant, low smoke zero halogen and are suitable for extreme temperatures.
- Complete with fire retardant, low smoke zero halogen, extreme temperature thread sealing gasket.




Technical Data

Type:	E1W LSOH
Gland Material:	Brass (Nickel Plated) BS 2874, EN 12164, Aluminium ASTM BS221 or Stainless Steel 316/316L
Seal Material:	LSOH Silicon
Cable Type:	Steel Wire Armour, Aluminium Armour Wire Fire Rated
Armour Clamping:	Rotating Captive Cone and Inspectible Cone Ring
Sealing Area:	Inner Sheath and Outer Sheath
Optional Accessories:	Adaptor, Reducer, Earth Tag, Locknut, Serrated Washer and Shroud

Standards and Certifications

Mechanical Properties:	Impact Category 8 Anchorage Type D	
Electrical Properties:	Category A (no earth tag) Category B (with earth tag)	
Continuous Operating Temp:	-65°C to +175°C	
Conformance:	Standard:	Certificate:
Design Standards	BS 6121:Part 1	CML 14CA364
	EN 50262	CML 14CA364
	IEC/BS EN 62444	CML 14CA364
	SANS 62444	MASC 11-303
	SANS 1213	MASC 18-2047, SANS 2109/4596
IP66/68 100m - Parallel	IEC 60529	CML 15Y728, MASC 11-263
IP65 - Tapered	IEC 60529	
Marine ABS	IEC 62444	ABS 20-SG1952694-PDA
	DNV-GL	IEC 60529, BS 6121, IEC 62444
EMC Compatible	EN 55011:2009, EN 55022	SGS EMC197708/1
Halogen Free	IEC 60754-2	TDWR 14-04-13
Flame Retardant	ASTM D 2863-09, ISO 4589-2	TDWR 14-04-13
Low Smoke	EN 45545-2	CSIR 24580f
London Underground Approval	BS EN 62444	LU 3043

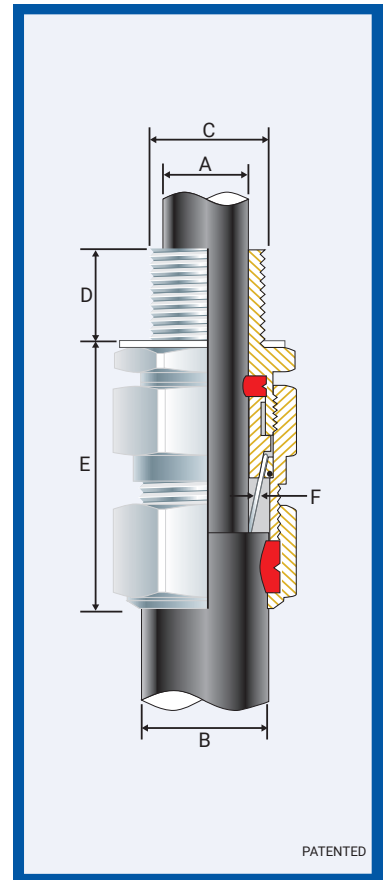

Installation Standards


- AS/NZS 3000
- BS 6121-5
- BS 7671
- BS 7430
- IEC 60364-5-54
- SANS 0142

Product Code	Gland Size Reference	Metric Entry Thread		NPT Entry Thread		Cable Detail				Max Length 'E'	Armour Dia		Hexagonal Detail		Install Torque Value Nm
		'C'	Min 'D'	'C'	Min 'D'	Min 'A'	Max 'A'	Min 'B'	Max 'B'		Min 'F'	Max 'F'	Max 'Flats'	Max 'Crns'	
052800-16	00-16ss	M16x1.5	10	-	-	3.0	8.5	8.0	13.5	50.0	0.90	0.90	▲♦24.0	♦ 27.0	35.0
052800	00-20ss	M20x1.5	10	½	15	3.0	8.5	8.0	13.5	50.0	0.90	0.90	▲♦24.0	♦ 27.0	35.0
0528-0	0-20s	M20x1.5	10	½	15	7.0	12.0	11.5	16.0	60.0	0.90	1.25	▲♦24.0	♦ 27.0	35.0
052801	1-20	M20x1.5	10	½/¾	15	9.0	15.0	14.5	20.5	70.0	0.90	1.25	▲ 27.0	♦ 30.0	35.0
052822	2s-25s	M25x1.5	10	¾/1	15/19	11.0	17.5	16.0	24.5	80.0	1.25	1.60	▲ 35.0	♦ 39.0	50.0
052802	2-25	M25x1.5	10	¾/1	15/19	14.0	20.0	20.5	26.5	80.0	1.25	1.60	▲ 35.0	♦ 39.0	50.0
052833	3s-32s	M32x1.5	10	1/1¼	19	15.0	22.0	23.0	30.5	80.0	1.60	2.00	▲ 42.0	♦ 47.0	70.0
052803	3-32	M32x1.5	10	1/1¼	19	19.0	26.5	26.5	33.5	80.0	1.60	2.00	▲ 42.0	♦ 47.0	70.0
052844	4s-40s	M40x1.5	15	1¼/1½	19/21	22.0	31.5	30.0	39.5	95.0	1.60	2.00	▲ 52.0	♦ 59.0	90.0
052804	4-40	M40x1.5	15	1¼/1½	19/21	26.0	34.0	33.0	42.5	95.0	1.60	2.00	▲ 52.0	♦ 59.0	90.0
052855	5s-50s	M50x1.5	15	1½/2	21	29.0	38.0	34.0	47.5	102.0	2.00	2.50	▲ 65.0	♦ 73.0	100.0
052805	5-50	M50x1.5	15	1½/2	21	34.0	44.5	42.5	52.5	102.0	2.00	2.50	▲ 65.0	♦ 73.0	100.0
052866	6s-63s	M63x1.5	15	2/2½	30	38.0	50.0	45.5	60.5	115.0	2.00	2.50	▲ 80.0	♦ 90.0	120.0
052806	6-63	M63x1.5	15	2/2½	30	44.0	56.5	52.5	65.5	115.0	2.00	2.50	▲ 80.0	♦ 90.0	120.0
052877	7s-75s	M75x1.5	15	2½/3	32	50.0	62.0	57.0	72.5	150.0	2.50	3.15	▲ 96.0	♦ 108.0	120.0
052807	7-75	M75x1.5	15	2½/3	32	56.0	67.5	65.5	78.0	150.0	2.50	3.15	▲ 96.0	♦ 108.0	120.0
052808	8-80	M80x2.0	20	3	32	68.0	74.0	78.0	82.0	150.0	2.50	3.15	▲ 96.0	♦ 108.0	120.0
052899	9s-90s	M90x2.0	20	3/3½	32/33	66.0	75.0	73.0	86.5	150.0	3.00	3.50	▲ 111.0	♦ 125.0	120.0
052809	9-90	M90x2.0	20	3/3½	32/33	74.0	81.5	82.0	91.0	150.0	3.00	3.50	▲ 111.0	♦ 125.0	120.0
052810	10-100	M100x2.0	20	3½/4	33/34	81.0	91.0	90.0	100.0	150.0	3.00	3.50	▲ 125.0	♦ 141.0	120.0
052811	11-110	M110x2.0	20	4	34	86.0	98.0	100.0	114.0	150.0	3.00	4.00	▲ 135.0	♦ 152.0	120.0
052812	12-120	M120x2.0	20	-	-	96.0	103.0	103.0	118.0	150.0	3.00	4.00	▲ 140.0	♦ 158.0	120.0
052813	13-130	M130x2.0	20	-	-	100.0	115.0	113.0	124.0	185.0	3.00	4.00	▲ 146.0	♦ 164.0	120.0


All dimensions except NPT are in mm. * For use with CCG Hex-Spanner. * For use with CCG C-Spanner Spanner.

♦ When manufactured in Aluminium, Hex will be 27 Across Flats and 30 Across Corners.


E1W LSOH CAPTIVE COMPONENT GLAND®

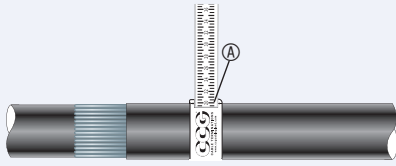

1. For accurate sizing, use a CCG Dimension Tape (A) on the inner and outer cable sheath.

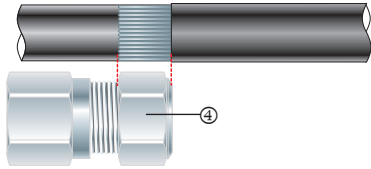


2. Cut back the cable outer sheath to expose the armour to a length not more than the outer nut (4).

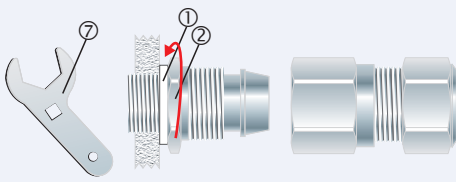


3. To maintain IP66/68 ensure the gasket (1) is in place. Screw the inner (2) into the apparatus. Tighten the inner (2), to installation torque using a CCG Spanner (7). If apparatus is untapped use a locknut.

Alternative installation through an unthreaded entry.


If the apparatus is untapped use a locknut.




If the gland has NPT entry threads fitted to a threaded entry then IP68 (2m) can be achieved by applying one of the following tested and approved grease types to the thread:- Renolit Lubrene CA700 or LX220 EP2, Renolit LC-WP2 or Moly LX2, or Dow Corning 4 Electrical Insulating Compound.

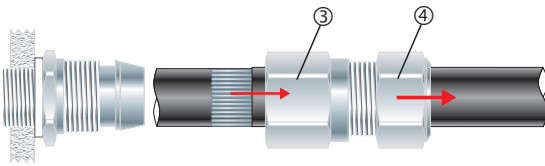


4. Pass the outer nut (4) and the body (3) over the cable.

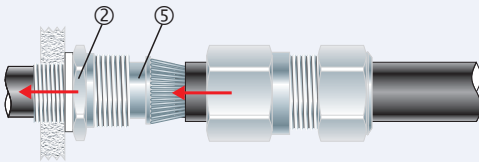


5. Pass cable end through the inner (2) and splay the armour wires over the cone (5).

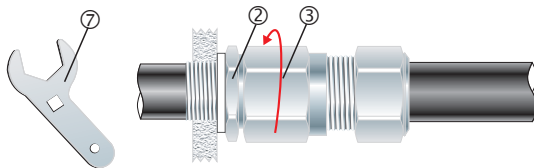

6. Tighten the body (3) onto the inner (2) until hand tight, then tighten with a CCG Spanner (7) with $\frac{3}{4}$ turn to lock the armour between the cone (5) and the cone ring (6).

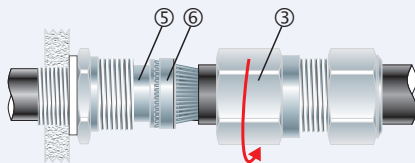

7. Unscrew the body (3). Check that the armour has locked between the cone (5) and the cone ring (6). (O-Ring on the cone ring (6) is sacrificial).

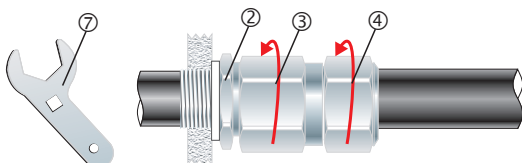

8. Tighten the body (3) onto the inner (2) to installation torque using a CCG Spanner (7). Tighten the outer nut (4) to produce a moisture proof seal by turning until the seal makes contact with the outer sheath of cable and then make one full turn.