

# SCREW FIT

## 4-WAY JUNCTION BOX - Ex eb I, Ex eb IIC, Ex ec IIC, Ex tc IIIC for Hazardous Area Installations



### Features and Benefits

- Screw Fit 4-Way Box for use in Group I mining (low impact areas), Group II and Group III applications.
- High-temperature resistance, corrosion resistant and anti-static properties.
- 20mm Box supplied complete with safety securing lid lanyard.
- Raised domed lid facilitates connections to be made outside of the box.
- Only approved CCG cable glands and terminals must be used. No exposed metal parts.
- Dust and waterproof to IP66/68, when used with CCG sealed cable glands.
- No drilling or tapping of cable entries required.
- Mounting studs provided for DIN rail if using Terminal Blocks.
- Internal earthing to all entries and rail provided.
- Screw Fit 4-Way Box can be buried for extended periods.
- Red Fire Rated Box for emergency circuits available (925°C for 3-hours).


### Technical Data

Type:	Screw Fit 4-Way
Box Material:	Impact corrosion and UV resistant glass reinforced polyester compound Polycarbonate (see-through adapt-a-lids) O ring seals: Silicone or Sarlink seals. Terminals: Wellamid or Wemidd Ex Certified Terminals, Box Spanner (Lid Locking Key). Blanking plugs are provided.
Optional Accessories:	
Note:	The installer should check that the materials are suitable for the installation environment

### Standards and Certifications

Equipment Protection Levels:	SANS: FINISHED: Ex e IIC T6 Gb, Ex nA IIC T6 Gc, Ex tb IIIC T70°C Db SANS: UNFINISHED: Ex e IIC Gb, Ex nA IIC Gc, Ex tb IIIC Db IECEX: FINISHED: Ex eb I Mb / Ex eb IIC T6 Gb / Ex ec T6 Gc / Ex tb IIIC T70°C Db / Ex tc IIIC T70°C Dc IECEX: UNFINISHED: Ex eb I Mb / Ex eb IIC Gb / Ex ec Gc / Ex tb IIIC Db / Ex tc IIIC Dc ATEX: FINISHED: Ex II 2 GD / II 3 GD Ex e IIC T6 Gb, Ex nA IIC T6 Gd, Ex tb IIIC T70°C Db ATEX: UNFINISHED: Ex II 2 GD / II 3 GD Ex e IIC Gb, Ex nA IIC Gd, Ex tb IIIC Db
------------------------------	--

Temperature Ambient :	-60°C to +55°C (Finished)	
Service Temperature:	-60°C to +110°C (Unfinished)	
Conformance:	Standard:	Certificate:
IECEX	IEC 60079 Parts 0, 7, 31 and IEC 60529	IECEX MSC 20.0003X (Finished) IECEX MSC 20.0004U (Unfinished)
ATEX	EN 60079 Parts 0, 7, 31	CML 14 ATEX 3036X (Finished)
	EN 60079 Parts 0, 7, 31	CML 14 ATEX 4038X (Finished)
	EN 60079 Parts 0, 7, 31	CML 14 ATEX 3037U (Unfinished)
	EN 60079 Parts 0, 7, 31	CML 14 ATEX 4039U (Unfinished)
SANS/IEC	SANS/IEC 60079 Parts 0, 7, 15 SANS/IEC 60079 Parts 31 and SANS/IEC 60529	MASC S/10-216X (Finished) MASC S/10-216U (Unfinished)
	IP66/68 2m Protection	IEC 60529
Marine ABS	IEC 60529	ABS 20-SG1952738-PDA
DNV-GL	IEC 60529	DNV-GL TAE0000011
Deluge Protection	DTS-01	CML 14CA370-1
Short Circuit/ Cont.Current	IEC 60947-7-2, IEC 62444	CATAPULT OR/15/11677_2

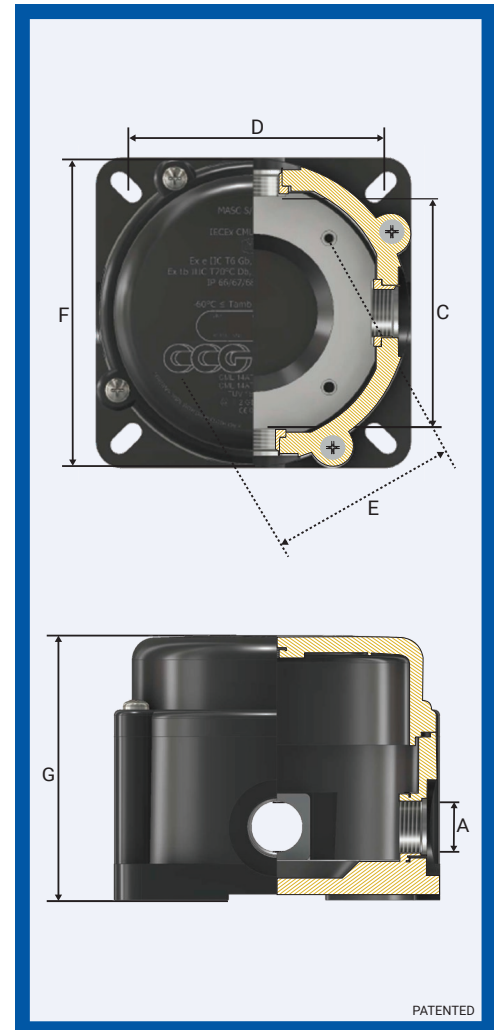

### Conditions for safe use

- In Group I applications, the junction box must only be used in low impact areas and where it is not exposed to oils or greases.
- Only the terminal blocks as per the description may be utilised in the junction box. Specific installation conditions as set by the terminal manufacturer/terminal certification must be considered. This includes considering the use of the applicable partitions and end plates for terminal blocks, conductor installation, tightening down of terminal block screws etc.
- Terminal blocks may only be utilized on the applicable rail and must allow sufficient space to make connections and to close the cover/lid.
- IP66/68 glands/plugs must be used in the threaded entries.
- Information in relation to entries is indicated in the instructions.

Product Code	Entry Thread 'A'	Distance Between Inserts 'C'	Mounting Centres 'D'	Rail Mounting Centres Holes 'E'	Outer Diameter 'F'	Overall Height 'G'
1003-0-M16-SF	M16	71.0	79.0	65.0	10.0	78.0
1003-0-SF	M20	71.0	79.0	65.0	10.0	78.0
100301-M16-SF	M16	88.0	92.0	80.0	118.0	98.0
100301-SF	M20	88.0	92.0	80.0	118.0	98.0
100302-M16-SF	M16	108.0	107.0	98.0	140.0	114.0
100302-M20-SF	M20	108.0	107.0	98.0	140.0	114.0
100302-SF	M25	108.0	107.0	98.0	140.0	114.0
100303-M16-SF	M16	166.0	167.0	150.0	206.0	142.0
100303-M20-SF	M20	166.0	167.0	150.0	206.0	142.0
100303-M25-SF	M25	166.0	167.0	150.0	206.0	142.0
100303-SF	M32	166.0	167.0	150.0	206.0	142.0
100303-M40-SF	M40	166.0	167.0	150.0	206.0	170.0

All dimensions are in mm.

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance. SCREWFITEX-HB130520

# SCREW FIT 4 WAY JUNCTION BOX

## Wiring and installation instructions for Srew Fit 4-Way Box with components

- Installation must be carried out by a competent person.
- Do not install under live current conditions.
- The box must not be modified in any way, as it may compromise the certification rating.
- All wiring must be carried out in accordance with the relevant Codes of Practice.
- The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown in Figure 1.
- The voltage and current value of the terminals in Table 2 must not be exceeded.
- Only those terminals shown in the terminal schedule may be incorporated in the box, refer Table 1.
- Inner cable bedding must protrude into the box by a minimum of 20mm past the cable entry point.
- Not more than one single or multiple strand lead shall be connected to either side of the terminals.
- Only earth conductors of equal size shall be connected with rail mounted terminals.
- All terminal screws used and unused shall be tightened.
- A parallel shaft screwdriver of the correct size should be used for rail mounted terminals screws.
- Where cables enter the box they must be secured by CCG Cable Glands appropriate to the makeup of the cable.
- Unused entry apertures must be blanked with CCG Non Metallic Plugs.
- To maintain IP66/68 a thread seal gasket between the box and cable gland must be installed.
- Before replacing the lid, ensure the lid gasket is in place.

TABLE 1

Box Type	Box Size	Terminal Type and Size	Max Quantity	Rail Size
Screw Fit 4 Way	1	2.5mm <sup>2</sup>	12	35
Screw Fit 4 Way	1	4mm <sup>2</sup> mini terminal	11	15
Screw Fit 4 Way	1	4mm <sup>2</sup>	11	35
Screw Fit 4 Way	1	6mm <sup>2</sup>	9	35
Screw Fit 4 Way	1	10mm <sup>2</sup>	7	35
Screw Fit 4 Way	1	16mm <sup>2</sup>	5	35
Screw Fit 4 Way	2	2.5mm <sup>2</sup>	16	35
Screw Fit 4 Way	2	4mm <sup>2</sup> mini terminal	14	15
Screw Fit 4 Way	2	4mm <sup>2</sup>	13	35
Screw Fit 4 Way	2	6mm <sup>2</sup>	11	35
Screw Fit 4 Way	2	10mm <sup>2</sup>	8	35
Screw Fit 4 Way	2	16mm <sup>2</sup>	7	35
Screw Fit 4 Way	2	35mm <sup>2</sup>	5	35

TABLE 2


### VOLTAGE PER TERMINAL CONFIGURATION

Terminals	Volt	Earth Terminals
AKZ 4	275V	AKE 4
WDU 2.5	550V	WPE 2.5
WDU 4	550V	WPE 4
WDU 6	550V	WPE 6
WDU 10	550V	WPE 10
WDU 16	550V	WPE 16
WDU 35	550V	WPE 35
WDU 70 N	550V	WPE 70 N

### Tools /Accessories


for general, industrial and mining electrical installations

### Pole Mounting Bracket



Product Code	Box Size Reference
401800	M20
401801	M20
401802	M25


### Non Metallic Plugs IP66/68 complete with washer



Product Code	Metric Dia 'A'	Dia Max 'B'	Dia Max 'C'	Dia Min 'D'	Hex Size Max A/F	Torque Value Nm
352720	M20x1.5	28.0	22.0	12.0	10.0	7.0
352725	M25x1.5	33.0	25.0	15.0	10.0	9.0
352732	M32x1.5	40.0	35.0	15.0	10.0	12.0




TS 15 Mini Rail



Mini Terminals for conductor sizes 0.5 to 4mm<sup>2</sup>



TS 35 Top Hat Rail



Terminals for conductor sizes 0.5 to 70mm<sup>2</sup>

FIGURE 1

The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown below.

