

SCREW FIT

4-WAY JUNCTION BOX - Ex eb I, Ex eb IIC, Ex ec IIC, Ex tc IIIC for Hazardous Area Installations



Features and Benefits

- Screw Fit 4-Way Box for use in Group I mining (low impact areas), Group II and Group III applications.
- High-temperature resistance, corrosion resistant and anti-static properties.
- 20mm Box supplied complete with safety securing lid lanyard.
- Raised domed lid facilitates connections to be made outside of the box.
- Only approved CCG cable glands and terminals must be used. No exposed metal parts.
- Dust and waterproof to IP66/68, when used with CCG sealed cable glands.
- No drilling or tapping of cable entries required.
- Mounting studs provided for DIN rail if using Terminal Blocks.
- Internal earthing to all entries and rail provided.
- Screw Fit 4-Way Box can be buried for extended periods.
- Red Fire Rated Box for emergency circuits available (925°C for 3-hours).

Technical Data

Type:	Screw Fit 4-Way - Ex
Box Material:	Impact corrosion and UV resistant glass reinforced polyester compound Polycarbonate (see-through adapt-a-lids)
Optional Accessories:	O ring seals: Silicone or Sarlink seals. Terminals: Wellamid or Wemidd Ex Certified Terminals, Box Spanner (Lid Locking Key). Blanking plugs are provided.
Note:	The installer should check that the materials are suitable for the installation environment

Standards and Certifications

Equipment Protection Levels: SANS: (Finished) Ex e IIC T6 Gb / Ex nA IIC T6 Gc / Ex tb IIIC T70°C Db
 SANS: (Unfinished) Ex e IIC Gb / Ex nA IIC Gc / Ex tb IIIC Db
 IECEx/INMETRO: (Finished) Ex eb I Mb / Ex eb IIC T6 Gb / Ex ec T6 Gc / Ex tb IIIC T70°C Db / Ex tc IIIC T70°C Dc
 IECEx/INMETRO: (Unfinished) Ex eb I Mb / Ex eb IIC Gb / Ex ec Gc / Ex tb IIIC Db / Ex tc IIIC Dc
 ATEX/UKEX: (Finished) Ex I M2 / II 2 GD / II 3 GD Ex eb I Mb / Ex eb IIC T6 Gb / Ex ec IIC T6 Gc / Ex tb IIIC T70°C Db / Ex tc IIIC T70°C Dc
 ATEX/UKEX: (Unfinished) Ex I M2 / II 2 GD / II 3 GD Ex eb I Mb / Ex eb IIC Gb / Ex ec IIC Gc / Ex tb IIIC Db / Ex tc IIIC Dc

Ambient Temperature:	-60°C to +55°C (Finished)	
Service Temperature:	-60°C to +110°C (Unfinished)	
Conformance:	Standard:	Certificate:
IECEX	IEC 60079 Part 0, 7, 31, IEC 60529	IECEX MSC 20.0003X (Finished)
	IEC 60079 Part 0, 7, 31, IEC 60529	IECEX MSC 20.0004U (Unfinished)
ATEX	EN 60079 Part 0, 7, 31	CML 14ATEX3036X (Finished)
	EN 60079 Part 0, 7, 31	CML 14ATEX4038X (Finished)
	EN 60079 Part 0, 7, 31	CML 14ATEX3037U (Unfinished)
	EN 60079 Part 0, 7, 31	CML 14ATEX4039U (Unfinished)
UKEX	EN/BS 60079 Part 0, 7, 31	CML 21UKEX3008X (Finished)
	EN/BS 60079 Part 0, 7, 31	CML 21UKEX4010X (Finished)
	EN/BS 60079 Part 0, 7, 31	CML 21UKEX3007U (Unfinished)
	EN/BS 60079 Part 0, 7, 31	CML 21UKEX4009U (Unfinished)
INMETRO (Brazil)	ABNT NBR IEC 60079 Part 0, 7, 31, IEC 60529	TÜV 15.0481X (Finished)
	ABNT NBR IEC 60079 Part 0, 7, 31, IEC 60529	TÜV 15.0482U (Unfinished)
CNEx (Chinese)	GB 3836.0, 3, GB 12476.1, 5	CNEx 21.3507X (Finished)
	GB 3836.0, 3, GB 12476.1, 5	CNEx CCC 2021312303000506 (Finished)
	GB 3836.0, 3, GB 12476.1, 5	CNEx 21.3390X (Unfinished)
	GB 3836.0, 3, GB 12476.1, 5	CNEx CCC 2021312313000393 (Unfinished)
SANS	SANS/IEC 60079 Part 0, 7, 31	MASC S/21-9001X (Finished)
	SANS/IEC 60529	MASC S/21-9002X (Unfinished)
IP66/68 2m Protection	IEC 60529	IECEX CML 15.0071U
Marine ABS	IEC 60529	ABS 20-SG1952738-1-PDA
DNV-GL	IEC 60529	DNV-GL TAE0000011
Deluge Protection	DTS-01	CML 14CA370-1
Short Circuit/ Cont.Current	IEC 60947-7-2, IEC 62444	CATAPULT OR/15/11677_2




Conditions for safe use

- In Group I applications, the junction box must only be used in low impact areas and where it is not exposed to oils or greases.
- Only the terminal blocks as per the description may be utilised in the junction box. Specific installation conditions as set by the terminal manufacturer/terminal certification must be considered. This includes considering the use of the applicable partitions and end plates for terminal blocks, conductor installation, tightening down of terminal block screws etc.
- Terminal blocks may only be utilized on the applicable rail and must allow sufficient space to make connections and to close the cover/lid.
- IP66/68 glands/plugs must be used in the threaded entries.
- Information in relation to entries is indicated in the instructions.

Product Code	Entry Thread 'A'	Distance Between Inserts 'C'	Mounting Centres 'D'	Rail Mounting Centres Holes 'E'	Outer Diameter 'F'	Overall Height 'G'
1003-0-M16-SF	M16	71.0	79.0	65.0	100.0	78.0
1003-0-SF	M20	71.0	79.0	65.0	100.0	78.0
100301-M16-SF	M16	88.0	92.0	80.0	118.0	98.0
100301-SF	M20	88.0	92.0	80.0	118.0	98.0
100302-M16-SF	M16	108.0	107.0	98.0	140.0	114.0
100302-M20-SF	M20	108.0	107.0	98.0	140.0	114.0
100302-SF	M25	108.0	107.0	98.0	140.0	114.0
100303-M16-SF	M16	166.0	167.0	150.0	206.0	142.0
100303-M20-SF	M20	166.0	167.0	150.0	206.0	142.0
100303-M25-SF	M25	166.0	167.0	150.0	206.0	142.0
100303-SF	M32	166.0	167.0	150.0	206.0	142.0
100303-M40-SF	M40	166.0	167.0	150.0	206.0	170.0

All dimensions are in mm.

CCG reserves the right to make alterations to the technical data, dimensions, designs and products available without notice. The illustrations cannot be considered binding. Please contact CCG for assistance. SCREWFITEX-HB270522

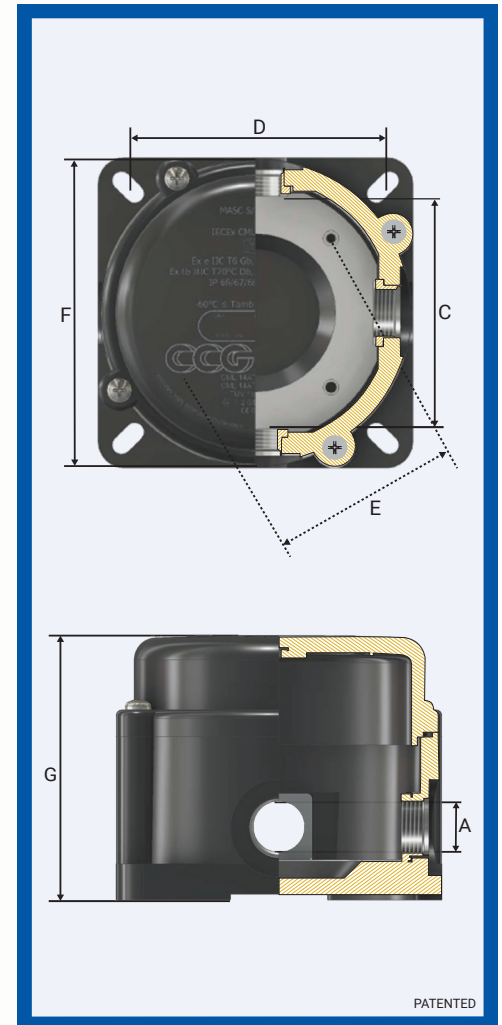

SCREW FIT 4 WAY JUNCTION BOX

Wiring and installation instructions for Screw Fit 4-Way Box with components

- Installation must be carried out by a competent person.
- Do not install under live current conditions.
- The box must not be modified in any way, as it may compromise the certification rating.
- All wiring must be carried out in accordance with the relevant Codes of Practice.
- The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown in Figure 1.
- The voltage and current value of the terminals in Table 2 must not be exceeded.
- Only those terminals shown in the terminal schedule may be incorporated in the box, refer Table 1.
- Inner cable bedding must protrude into the box by a minimum of 20mm past the cable entry point.
- Not more than one single or multiple strand lead shall be connected to either side of the terminals.
- Only earth conductors of equal size shall be connected with rail mounted terminals.
- All terminal screws used and unused shall be tightened.
- A parallel shaft screwdriver of the correct size should be used for rail mounted terminals screws.
- Where cables enter the box they must be secured by CCG Cable Glands appropriate to the makeup of the cable.
- Unused entry apertures must be blanked with CCG Non Metallic Plugs.
- To maintain IP66/68 a thread seal gasket between the box and cable gland must be installed.
- Before replacing the lid, ensure the lid gasket is in place.

TABLE 1

Box Type	Box Size	Terminal Type and Size	Max Quantity	Rail Size
Screw Fit 4 Way	1	2.5mm ²	12	35
Screw Fit 4 Way	1	4mm ² mini terminal	11	15
Screw Fit 4 Way	1	4mm ²	11	35
Screw Fit 4 Way	1	6mm ²	9	35
Screw Fit 4 Way	1	10mm ²	7	35
Screw Fit 4 Way	1	16mm ²	5	35
Screw Fit 4 Way	2	2.5mm ²	16	35
Screw Fit 4 Way	2	4mm ² mini terminal	14	15
Screw Fit 4 Way	2	4mm ²	13	35
Screw Fit 4 Way	2	6mm ²	11	35
Screw Fit 4 Way	2	10mm ²	8	35
Screw Fit 4 Way	2	16mm ²	7	35
Screw Fit 4 Way	2	35mm ²	5	35

TABLE 2


VOLTAGE PER TERMINAL CONFIGURATION

Terminals	Volt	Earth Terminals
AKZ 4	275V	AKE 4
WDU 2.5	550V	WPE 2.5
WDU 4	550V	WPE 4
WDU 6	550V	WPE 6
WDU 10	550V	WPE 10
WDU 16	550V	WPE 16
WDU 35	550V	WPE 35
WDU 70 N	550V	WPE 70 N

Tools /Accessories


for general, industrial and mining electrical installations

Pole Mounting Bracket



Product Code	Box Size Reference
401800	M20
401801	M20
401802	M25


Non Metallic Plugs IP66/68 complete with washer



Product Code	Metric Dia 'A'	Dia Max 'B'	Dia Max 'C'	Dia Min 'D'	Hex Size Max A/F	Torque Value Nm
352720	M20x1.5	28.0	22.0	12.0	10.0	7.0
352725	M25x1.5	33.0	25.0	15.0	10.0	9.0
352732	M32x1.5	40.0	35.0	15.0	10.0	12.0




TS 15 Mini Rail



Mini Terminals for conductor sizes 0.5 to 4mm²



TS 35 Top Hat Rail



Terminals for conductor sizes 0.5 to 70mm²

FIGURE 1

The wiring insulation must not extend by more than 1.0mm from the metal face of the terminal as shown below.

