


ACCESSORIES



PVC Short Shroud




London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1522-0	00/0
152201	1
152202	2
152203	3
152204	4
152205	5
152206	6
152207	7
152208	8
152209	9
152210	10

All dimensions are in mm.

Long Shroud




London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1523-0	00/0
152301	1
152302	2
152303	3
152304	4
152305	5
152306	6
152307	7
152308	8

All dimensions are in mm.

LSOH Long Shroud




London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1524-0	00/0
152401	1
152402	2
152403	3
152404	4
152405	5
152406	6
152407	7
152408	8

All dimensions are in mm.

PVC Long Shroud



London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1525-0	00/0
152501	1
152502	2
152503	3
152504	4
152505	5
152506	6
152507	7
152508	8
152509	9
152510	10
152511	11
152512	12
152513	13

All dimensions are in mm.

LSOH Grey Shroud




London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1526-0	00/0
152601	1
152602	2
152603	3
152604	4
152605	5
152606	6
152607	7
152608	8
152609	9
152610	10
152611	11

All dimensions are in mm.

PVC-U Shroud Black Long



London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1527-0	00/0
152701	1
152702	2
152703	3
152704	4

All dimensions are in mm.
For sizes larger than 4 use PVC Shroud Black Long.

PVC-U Shroud Orange Long



London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1527-0-OR	00/0
152701-OR	1
152702-OR	2
152703-OR	3
152704-OR	4

All dimensions are in mm.

LSOH-U Shroud Grey Long




London Underground Approval: 3043 (LU Standard 1-085)

Product Code	Size Reference
1528-0	00/0
152801	1
152802	2
152803	3
152804	4

All dimensions are in mm.

Brass Locknut Metric (Nickel Plated)

STAINLESS STEEL 316/316L
ON AVAILABLE ON REQUEST




Product Code	Size Ref	Metric Size	Across Flats	THICK (A)
300901-M16	0	M16x1.5	22.0	4.0
300901	1	M20x1.5	25.0	5.0
300902	2	M25x1.5	32.0	5.0
300903	3	M32x1.5	42.0	5.0
300904	4	M40x1.5	60.0	5.0
300905	5	M50x1.5	60.0	6.0
300906	6	M63x1.5	80.0	6.0
300907	7	M75x1.5	90.0	7.0
300908	8	M80x2.0	96.0	8.0
300909	9	M90x2.0	111.0	8.0

All dimensions are in mm.

Brass Locknut NPT (Nickel Plated)

STAINLESS STEEL 316/316L
ON AVAILABLE ON REQUEST




Product Code	Size Ref	NPT Size	Across Flats	THICK (A)
300901-12NPT	1	½ NPT	25	4.5
300902-34NPT	2	¾ NPT	32	4.5
300903-1NPT	3	1 NPT	38	5.0
300904-1¼NPT	4	1¼ NPT	52	5.0
300905-1½NPT	5	1½ NPT	52	5.0
300906-2NPT	6	2 NPT	65	6.0
300907-2½NPT	7	2½ NPT	80	8.0
300908-3NPT	8	3 NPT	96	8.0
300909-3½NPT	9	3½ NPT	111	10.0
300910-4NPT	10	4 NPT	127	10.0

All dimensions except NPT are in mm.

Hybrid Slip-On Earth Tag

NICKEL PLATED BRASS OR STAINLESS STEEL 316/316L

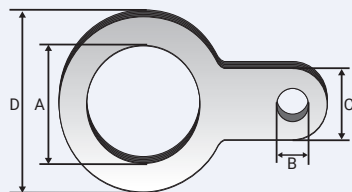


Product Code	Size Ref.	Diameter 'A'	Diameter 'B'	Dimension 'C'	Diameter 'D'	Square Section	Nominal Thickness	Short Circuit Fault Current Ratings BS6121 Part 5: 1993	
622801	0/1	M20	7.0	12 x 1.5	37.0	18mm ²	1.5	20.0	3.06KA / 1 second
622802	2	M25	7.0	12 x 1.5	47.0	18mm ²	1.5	25.0	4.00KA / 1 second
622803	3	M32	13.0	22 x 1.5	54.0	33mm ²	1.5	32.0	5.40KA / 1 second
622804	4	M40	13.5	32 x 1.5	69.0	48mm ²	1.5	40.0	7.20KA / 1 second
622805	5	M50	13.5	40 x 1.5	87.0	60mm ²	1.5	50.0	10.40KA / 1 second
622806	6	M63	13.5	40 x 1.5	115.0	60mm ²	1.5	63.0	10.40KA / 1 second
622807	7	M75	13.5	40 x 1.5	130.0	60mm ²	1.5	75.0	10.40KA / 1 second
622808	8	M80	13.5	40 x 1.5	130.0	60mm ²	1.5	-	-
622809	9	M90	13.5	40 x 1.5	142.0	60mm ²	1.5	-	-
622810	10	M100	13.5		154.0		1.5	-	-

All dimensions are in mm.

Slip-On Earth Tag

NICKEL PLATED BRASS OR STAINLESS STEEL 316/316L

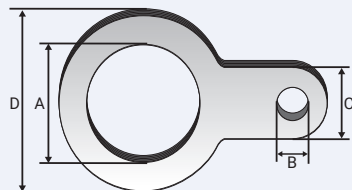


Product Code	Size Ref.	Diameter 'A'	Diameter 'B'	Dimension 'C'	Diameter 'D'	Square Section	Nominal Thickness	Short Circuit Fault Current Ratings BS6121 Part 5: 1993	
6220-1	0/1	M20	7.0	12 x 1.5	28.0	18mm ²	1.5	20.0	3.06KA / 1 second
622902	2	M25	7.0	12 x 1.5	35.0	18mm ²	1.5	25.0	4.00KA / 1 second
622903	3	M32	13.0	22 x 1.5	45.5	33mm ²	1.5	32.0	5.40KA / 1 second
622904	4	M40	13.5	32 x 1.5	54.0	48mm ²	1.5	40.0	7.20KA / 1 second
622905	5	M50	13.5	40 x 1.5	65.0	60mm ²	1.5	50.0	10.40KA / 1 second
622906	6	M63	13.5	40 x 1.5	83.0	60mm ²	1.5	63.0	10.40KA / 1 second
622907	7	M75	13.5	40 x 1.5	98.0	60mm ²	1.5	75.0	10.40KA / 1 second
622908	8	M80	13.5	40 x 1.5	98.0	60mm ²	1.5	-	-
622909	9	M90	13.5	40 x 1.5	115.0	60mm ²	1.5	-	-

All dimensions are in mm.

Screw-On Earth Tag


NICKEL PLATED BRASS OR STAINLESS STEEL 316/316L



Product Code	Size Ref.	Diameter 'A'	Diameter 'B'	Dimension 'C'	Square Section	Nominal Thickness	Short Circuit Fault Current Ratings BS6121 Part 5: 1993	
60320-1	0/1	M20	M6	10 x 3	30mm ²	3.0	20.0	26KA / 1 second
603202	2	M25	M6	10 x 4	40mm ²	4.0	25.0	26KA / 1 second
603203	3	M32	M6	12 x 6	70mm ²	6.0	32.0	26KA / 1 second
603204	4	M40	M8	20 x 6	120mm ²	6.0	40.0	26KA / 1 second
603205	5	M50	M10	24 x 8	185mm ²	8.0	50.0	43KA / 1 second
603206	6	M63	M12	40 x 8	300mm ²	8.0	63.0	43KA / 1 second
603207	7	M75	M12	40 x 8	300mm ²	8.0	75.0	43KA / 1 second
603208	8	M82	M12	40 x 8	300mm ²	8.0	-	-
603209	9	M90	M12	40 x 8	300mm ²	8.0	-	-

All dimensions are in mm.

Sealing Gasket Metric




Product Code	Metric Size	Thck 'A'
805520	M20	2.0
805525	M25	2.0
805532	M32	2.0
805540	M40	2.0
805550	M50	2.0
805563	M63	2.0
805575	M75	2.0
805580	M80	2.0
805590	M90	2.0

All dimensions are in mm.

Sealing Gasket HT Metric

High Temperature




Product Code	Metric Size	Thck 'A'
805520-T	M20	2.0
805525-T	M25	2.0
805532-T	M32	2.0
805540-T	M40	2.0
805550-T	M50	2.0
805563-T	M63	2.0
805575-T	M75	2.0
805580-T	M80	2.0
805590-T	M90	2.0

All dimensions are in mm.

Serrated Washer


STAINLESS STEEL 316/316L

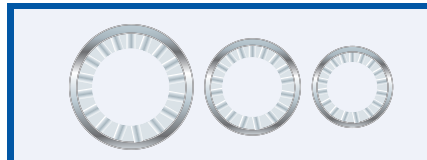

Product Code	Metric Size
805620	M20
805625	M25
805632	M32
805640	M40
805650	M50
805663	M63
805675	M75
805680	M80
805690	M90

All dimensions are in mm.

Insulation Sleeve

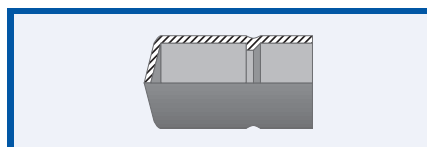

Product Code	Size Reference
550502	2

All dimensions are in mm.

Terminal Connector



Product Code	Size Ref.	Hole Diameter	Allen Key No.
580302	2	10.0	4.0

All dimensions are in mm.